
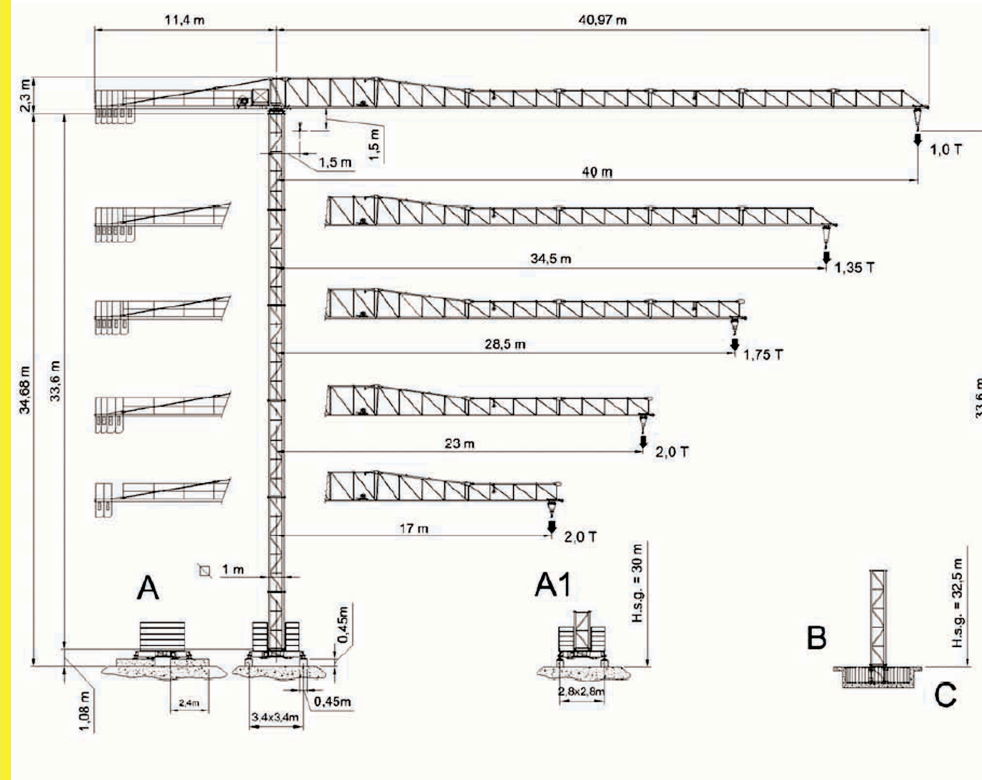




Azienda Certificata - Sistema Qualità ISO 9001 - DAS IT02/077 - UKAS 127-A




Gru a torre per l'edilizia



A

A1

stabilizzatore regolabile



B



TERRITMX 40-1000





RAGGI E PORTATE RADIUS AND S.W.L. AUSLADUNG UND TRAGFAHIGKEIT PORTEE ET CHARGE UTILE

Portata max / Max s.w.l. Charge maxi / Max. Tragfähigkeit		2000 kg.					
Braccio / Jib Ausleger / Flèche	m.	17	23	28.5	35	40	
Campo di portata max da Max s.w.l. range from Charge maxi de Max. Tragfähigkeit von	1,4 m	a to a bis	17	20,9	25.2	23,8	21,3
Raggi (m.) Radii (m.) Portée (m.) Ausladung (m.)	10	2000	2000	2000	2000	2000	2000
	12	2000	2000	2000	2000	2000	2000
	14	2000	2000	2000	2000	2000	2000
	16	2000	2000	2000	2000	2000	2000
	17	2000	2000	2000	2000	2000	2000
	18		2000	2000	2000	2000	2000
	20		2000	2000	2000	2000	2000
	21		2000	2000	2000	2000	2000
	22		2000	2000	2000	1930	1930
	23		2000	2000	2000	1839	1839
	24			2000	1900	1756	1756
	25			2000	1905	1680	1680
	26				1932	1610	1610
	28				1750	1495	1495
	30					1377	1377
	32					1282	1282
	34					1199	1199
	35					1161	1161
	38					1059	1059
	40					1000	1000

BRACCIO E CONTRAPPESO		JIB AND COUNTERWEIGHT		FLECHE ET CONTREPOIDS		AUSLEGER UND GEGENGEWICHTSBALLAST	
Braccio / Jib Flèche / Ausleger		(m)	17	23	28,5	35	40
Contrappeso / Counterweight Contrepoids / Gegengewicht		(t)	2,384	4,012	4,826	5,640	5,640
Composizione Composition Komposition		Tipo / Type	Quantità / Quantity / Nombre / Anzahl				
		A 350 (814 Kg.)	-	2	3	4	4
		B 510 (1192 Kg.)	2	2	2	2	2


H.S.C., LEST DE BASE MAXI ET REACTIONS
HAKENHOHEN, MAXIMALE ZENTRALBALLASTE UND ECKKRAFT

ALTEZZA SOTTOGANCIO, ZAVORRA DI BASE, REAZIONI
H.U. H MAX. BASE BALLAST AND CORNER PRESSURE

A			A1			B		
								
H	Z	P MAX.	H	Z	P MAX.	H	T MAX.	P MAX.
m.	(t.)	(t.)	m.	(t.)	(t.)	m.	(t.)	(t.)
33,2	44	31	-	-	-	32,5	38,5	52,5
29,6	36	28	29,6	48	37	28,9	35,5	45,0
23,6	32	25	23,6	44	34	22,9	31,0	40,0
17,6	32	25	17,6	44	30	16,9	31,0	40,0
11,6	32	25	11,6	44	30	10,9	31,0	40,0
Argano - Hoisting winch - Treuil - Hubwerk			Velocità-Speed Vitesse-Geschwindigkeit			Potenza-Power Puisseance-Leistung		
Portata/Velocità - Load/Speed-Charge/Vitesse - Tragfähigkeit/Ceshwindigkeit						4 HP 2,9 KW		
12 HP (8,8 KW)			20/40 m/min			2 HP 1,4 KW		
1	2000 kg. / 5,5 m/min							
2	2000 kg. / 22 m/min							
3	900 kg. / 44 m/min							

Conforme alla direttiva CEE 2000/14/CE sul livello acustico - In compliance with the ECC 2000/14/CE instruction on noise level - Conforme à directive CEE 2000/14/CE sur le niveau acoustique - Gemess EWG 2000/14/CE über Schall - Conforme con la direttiva CEE 2000/14/CE sobre el nivel acustico.

LISTA DEI PESI / PACKING LIST
LISTE DE COLISAGE / KOLLI-LISTE

Pos. Item	Pezzi Pieces	Denominazione Description	Schizzo Sketch	Dimensioni Dimensions			Peso Weight (Kg)		
				L	W	H	Unit.	Total	
1	1	Elemento di freccia Jib element Élément de flèche Ausleger	N°1		5,930	0,790	2,040		650
	1		N°2		5,930	0,790	1,930		597
	1		N°3		5,985	0,790	1,190		364
	1		N°4		11,860	0,790	1,190		321
	1		N°5		6,020	0,790	1,190		297
	1		N°6		1,700	0,790	1,190		263
	1		N°7		1,700	0,790	1,190		238
2	1	Controfreccia girevole, argano sollev., quadro elettrico, cuspidi. Counterjib-turnstile, hoisting winch, trolley jib, electrical box, a frame. Contreflèche tournante, treuil de levage, armoire électrique, pointe. Gegenausleger, Hubwinde, Drehwerk Schaltschrank.		3,75	1,705	2,3		1925	
	1	Elemento controfreccia esterno. External counterjib. Contreflèche extérieure. Externes gegenausleger.		9,1	0,875	1,23		795	
3	4	Blocchi di contrappeso Counterweight block Contre-poids Gegengewichtsblocke		A 350	0,600	0,35	2,145	814	3256
	2			B 510	0,600	0,51	2,145	1192	2384
4	1	Elemento di torre Tower element Élément de mât Turmstück		6,0	1,11	1,11		985	
				3,6	1,11	1,11		595	
5	1	Tronchetto di fondazione Expendable foundation element Élément à sceller Fundamentanker		1,075	1,11	1,11		334	
6	1	Trave principale di base		TP (2,8x2,8m) TP (3,4x3,4m)	4,16 5,01	2,4 2,4	0,605 0,605	- -	1083 1154
	2	Semi-trave di base		TP (2,8x2,8m) TP (3,4x3,4m)	1,15 1,575	0,3 0,3	0,49 0,49	172 225	344 450
7	24	Blocco di zavorra Base ballast block Lest de base Grundballastblöcken		(2,8x2,8m)	2,800	0,360	0,900	2000	48000
	(3,4x3,4m)			2,800	0,360	0,900	2000	44000	